

Photoelectric Sensors DPSV Series



User Manual

Thank you for choosing Degson products. Please read this instruction manual carefully before using the product.

- It is intended to be used by personnel with certain electrical knowledge.
- Before using this product, please read this manual carefully and use it correctly after fully understanding the product.
- For your convenience, please keep this manual properly so that you can refer to it at any time.

symbol

The following symbols are important reminders in this manual. Please be sure to comply with the following.

| | |
|--|--|
| | There is a risk of malfunction or fire. Please do not exceed the rated voltage when using. |
| | Do not use AC power as there is a risk of rupture. |
| | There is a risk of burns due to high temperatures. |

Safety Tips

To ensure your safety, please be sure to follow the following.

- Do not use in an environment with flammable or explosive gases.
- Do not use the product in an environment with water, oil, chemical droplets, or in contact with steam.
- Do not disassemble, repair, or modify the product without authorization.
- Do not exceed the rated voltage and current range during use.
- Do not use in environments beyond the rated value.
- Please pay attention to the polarity of the working power supply and do not connect the wrong wires.
- Please connect the load correctly.
- Do not short-circuit the load.
- Do not use if the casing is damaged.
- When disposing of it, please treat it as industrial waste.
- Do not use in direct sunlight.
- Due to the use conditions (ambient temperature, power supply voltage, etc.), the sensor surface temperature may rise. Please be careful when operating or cleaning it, as there is a risk of burns.

Instructions for use

- Do not use in the following places:
Locations exposed to direct sunlight
Places with high humidity and easy condensation
Places containing corrosive gases
Locations where vibration and shock are directly transmitted to the product body
- When the lead wires of this product are installed in the same conduit as the power wires and electric power wires, they may be interfered with, malfunction or even be damaged.
- Extension cables must have a cross-sectional area of 0.3mm² or more and a length of 100m or less.
When using Korean S-mark certified models as certified products, please set the length to 10m or less.
- Please refer to the force applied to the wire: tension less than 40N, torque less than 0.1N·m, pressure less than 20N, bending less than 3Kg.
- After the power is turned on, this product is in a detectable state within 200ms. Therefore, if the load and the product are connected to different power supplies. The product must be powered on first.
- After cutting off the power supply, output pulses may occur, so please cut off the power supply to the load or load line first.
- Please do not use solvents such as thinner, gasoline, acetone, kerosene, etc. to clean.

Confirmation of packaging contents

- sensor one (one pair)
- User Manual one
- screwdriver one

Technical specifications


| type | DPSV Series | | |
|---------------------|---|--------------|--------------------|
| model | DPSV-D30N(P) | DPSV-D70N(P) | DPSV-Q09N(P) |
| Detection method | Diffuse | | Limited Reflection |
| Detection distance | 10-300mm | 5-1000mm | 5-140mm |
| Switch mode | L.on (light-incoming action) / D.on (light-blocking action) switchable | | |
| Indicator Lights | Working indicator light: green; Action indicator light: red | | |
| Response time | <1ms | | |
| Current consumption | ≤25mA | | |
| Protection Circuit | Power reverse polarity protection/output reverse polarity protection/surge protection /short circuit protection | | |
| light source | Infrared LED 940nm (modulated) | | |

| type | DPSV Series | | | |
|---------------------|--|-----------------|--|---------------|
| model | DPSV-TM20NO(PO) | DPSV-TM20NC(PC) | DPSV-TM20AN(AP) | DPSV-T500N(P) |
| Detection method | Shooting | | | |
| Detection distance | 20m non-adjustable | 20m | 5m | |
| Switch mode | L.on (light-on action) / D.on (light-off action) models are available | | L.on (light-incoming action) / D.on (light-blocking action) switchable | |
| Indicator Lights | Transmitter: Power indicator: green; Receiver: Working indicator: green; Action indicator: red | | | |
| Response time | <5ms | | | |
| Current consumption | Transmitter ≤ 20mA; Receiver ≤ 20mA | | | |
| Protection Circuit | Power reverse polarity protection/surge protection/short circuit protection | | | |
| light source | Infrared LED 940nm (modulated) | | | |


| | |
|------------------------|---|
| Output Mode | NPN or PNP open collector |
| Operating voltage | 10~30V DC |
| Load current | ≤100mA |
| Outlet mode | 2M 3-core cable |
| Applicable environment | IP65 |
| Operating temperature | - 25°C~+55°C No freezing; No condensation |
| Ambient humidity | 35%~85%RH, no condensation |
| Ambient illumination | Incandescent lamp: 3000 LUX or less / Sunlight: 10000 LUX or less |
| Vibration resistance | 10~50HZ, 0.5MM amplitude, 2 hours each in X, Y, and Z directions |

Circuit Diagram

NPN output

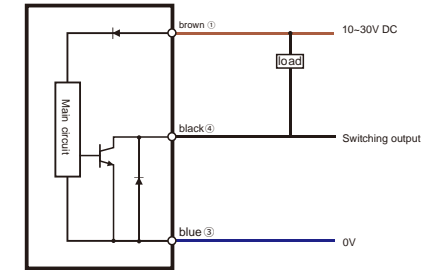


PNP output

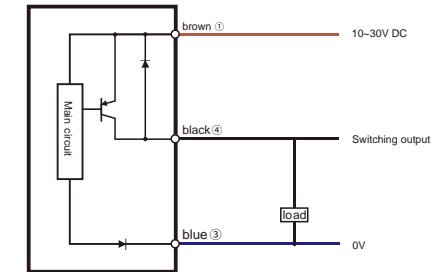


Dimensions



DPSV-D30/D70/Q09

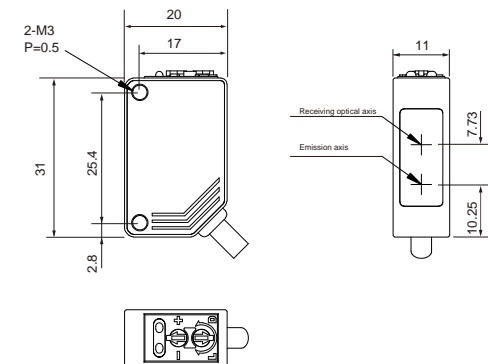

DPSV-TM20NO/PO/NC/PC

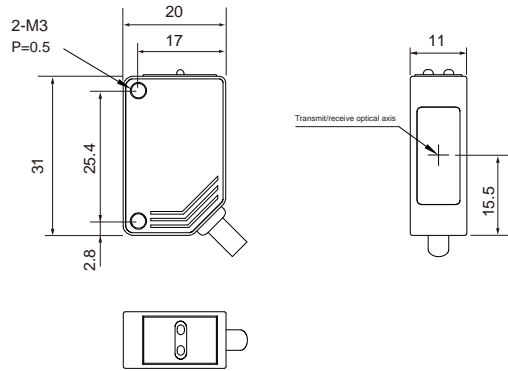


DPSV-TM20AN/AP DPSV-T500

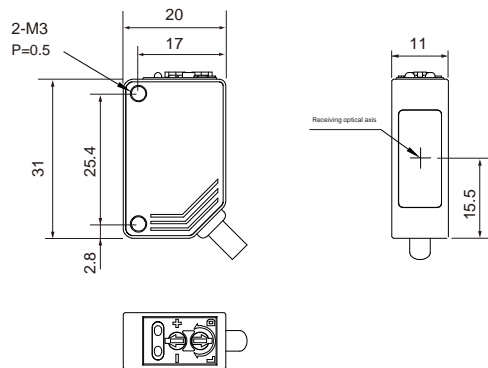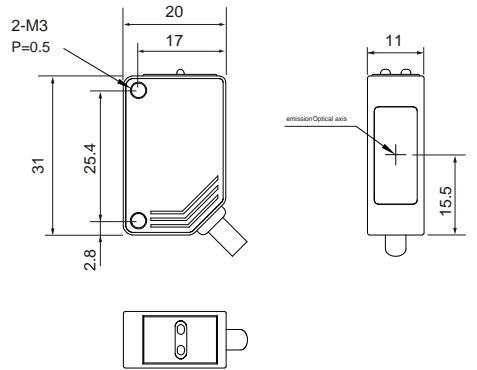


Installation

Through-beam type

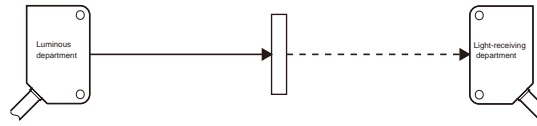

Diffuse reflection

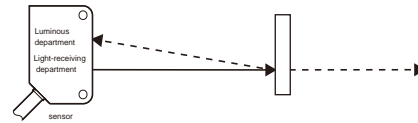


Regular maintenance checks

During use, regular inspection and maintenance on weekdays are very necessary to ensure the normal operation of the machine. Regular inspection items are as follows:

- When detecting an object, check whether the switch is within the distance, whether it is loose, whether it is tilted, and whether the detected object has changed.
- Check whether the wiring or connecting wires are in normal contact or there is no concern about disconnection.
- Check whether there is dust on the sensing surface.
- Check whether the operating temperature and surrounding environment are normal.
- Check the installation space for any abnormalities, such as vibration, electrical leakage, etc.

other:

- After power is turned on, the sensor needs a lead time of 100ms to achieve stable output of the sensor. Therefore, do not operate the sensor during this period. Avoid outdoor use (unless there is a shelter).
- Avoid direct contact with organic solvents.
- Prevent the detection surface from being hit by objects, as the sensing surface is very fragile.
- Do not pull or move the power supply excessively during installation or operation.




Precautions

- Make sure the power is off when wiring.
- Make sure that the power supply voltage is within the rated range.
- If power is provided by a commercial switching regulator, make sure the frame ground terminal (FG) of the power supply is connected to ground.
- Be sure to connect the grounding terminal (FG) of this equipment to ground.
- Do not use the device within a short period of time (0.5s) after power is turned on.
- Do not run wiring together with high voltage or power lines or in the same conduit as this may cause malfunction due to induction.
- Avoid dust, dirt and water vapor.
- Do not place the sensor in direct contact with water, oil, grease or organic solvents such as thinners.

Power Distribution Considerations

Supply voltage


Do not use the product beyond the voltage range. Inputting voltage beyond the range or inputting AC power into a DC power type may cause the product to rupture or burn out.



Load short circuit


Do not short-circuit the load to avoid rupture or burning.

The load short-circuit holding function is a function used within the rated voltage with the correct polarity of the power supply.




Miswiring

Do not mismatch the polarity of the power supply, as this may cause rupture or burning.



When no load is connected

If the power supply is directly connected to the internal element without load, it may cause cracking or burning. Therefore, please add load before wiring.



Product Commitment

Degson's products undergo strict factory inspection. If a fault occurs, please contact the nearest Degson office and provide detailed information so that we can solve it as soon as possible.

Warranty

The product warranty period is one year, starting from the date the product is shipped to the place designated by the purchaser.

Warranty coverage

- (1) If a fault occurs during the warranty period stated above and caused by Degson Degson will repair the product free of charge. However, the following situations are not covered by the warranty.
 - Failures caused by improper operation or improper use under conditions or environments not specified in the operating instructions, user manual or technical requirements specifically agreed upon between the purchaser and Degson.
 - The failure is not due to a product defect but is caused by the design of the purchaser's equipment or the purchaser's software.
 - Failure caused by modification or repair performed by anyone other than Degson personnel.
 - Failures that can be completely avoided by properly repairing or replacing wearing parts as specified in the operating instructions or user manual.
 - Failures caused by unforeseen changes in scientific and technological levels after the product is shipped from Degson.
 - Degson is not responsible for malfunctions caused by natural disasters such as fire, earthquake, and flood, or external factors such as abnormal voltage.
- (2) The warranty covers only the situations specified in Article (1). Degson shall not be liable for any indirect losses (damage to equipment, loss of opportunity, loss of profits, etc.) or other losses caused to the purchaser by its equipment.

Product Suitability

Degson's products are designed and manufactured as general-purpose products for general industries. Therefore,

Degson's products must not be used for the following applications and are not suitable for their use. However,

if the purchaser consults Degson in advance about the use of the product with a responsible attitude and understands

the technical specifications, grades and performance of the product, and takes necessary safety measures, the product can be used

In this case, the product warranty scope is the same as above.

- Use in applications that may result in chemical contamination or electrical interference, or use under conditions or environments not described in the product catalog, instruction manual, etc.
- Atomic power control equipment, incineration equipment, railways, aviation, vehicle equipment, safety devices and administrative agencies and equipment manufactured in accordance with the regulations of individual industries.
- Machinery, systems, and devices that may endanger life or property.
- Gas, water, and electricity supply systems that operate continuously 24 hours a day require highly reliable equipment.