
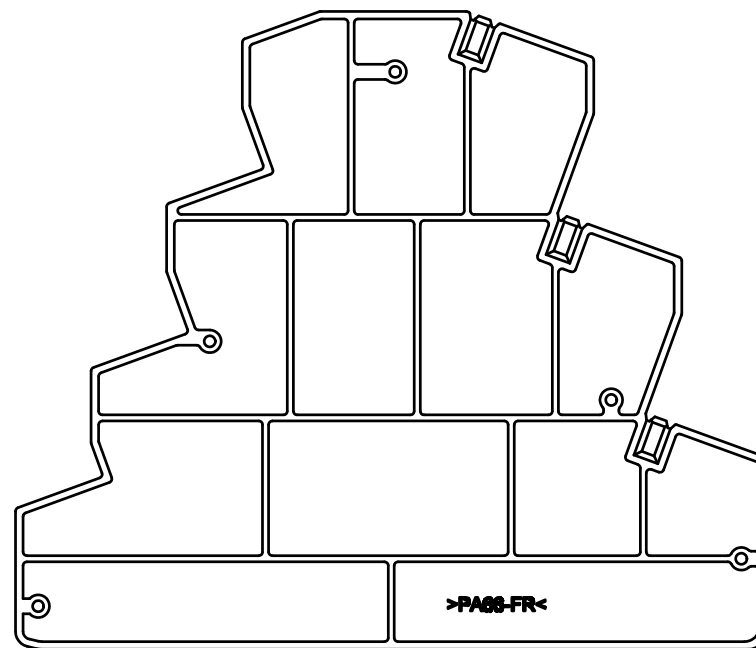
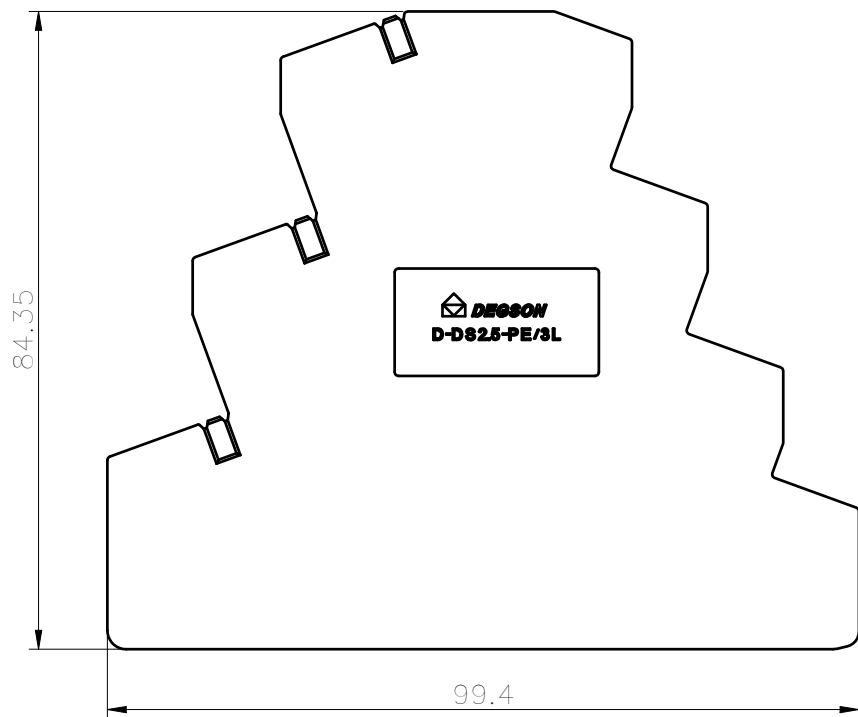
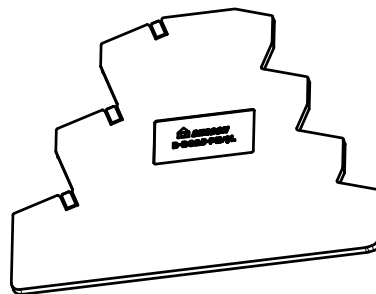


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

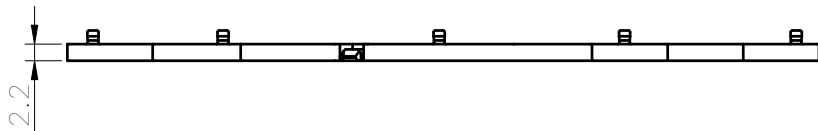

使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes
阻燃等级/Flame Class	UL94 V-0

		MATERIAL: PA66	SURFACE: /		
		MAT. NO./REV: /	MAT STATUS: /		
APPD: Peng M	2022.06.07	NAME			
CHKD: Gao WG	2022.06.07	D-DS2.5-PE/3L-01P-1Y-00A(H)			
DRFT: Chen KZ	2022.06.07	DRAWING NO. /	TYPE	DRAWING STATUS	SCALE
		CUSTOMER DRAWING		/	1:1
					SHEET 1/1

00	/	/	Chen KZ	2022.06.07
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless express authorization is granted. All rights reserved for patent, utility, model or designs registrations. 非经许可, 不得复制或传播. 未经许可, 不得复制或传播. 未经许可, 不得复制或传播. 未经许可, 不得复制或传播. 未经许可, 不得复制或传播.