


### ◆ 8 channel Digital input /24VDC/PNP (DF20-M-8DI-P)

- It receives control signals from digital field devices (e.g., sensors).
- 8-channel digital input, active PNP high level.
- Each input module has a noise-rejection filter.
- Each input module is equipped with an LED indicator.
- Field and system levels are Photoelectric isolated.
- Protection level IP20.

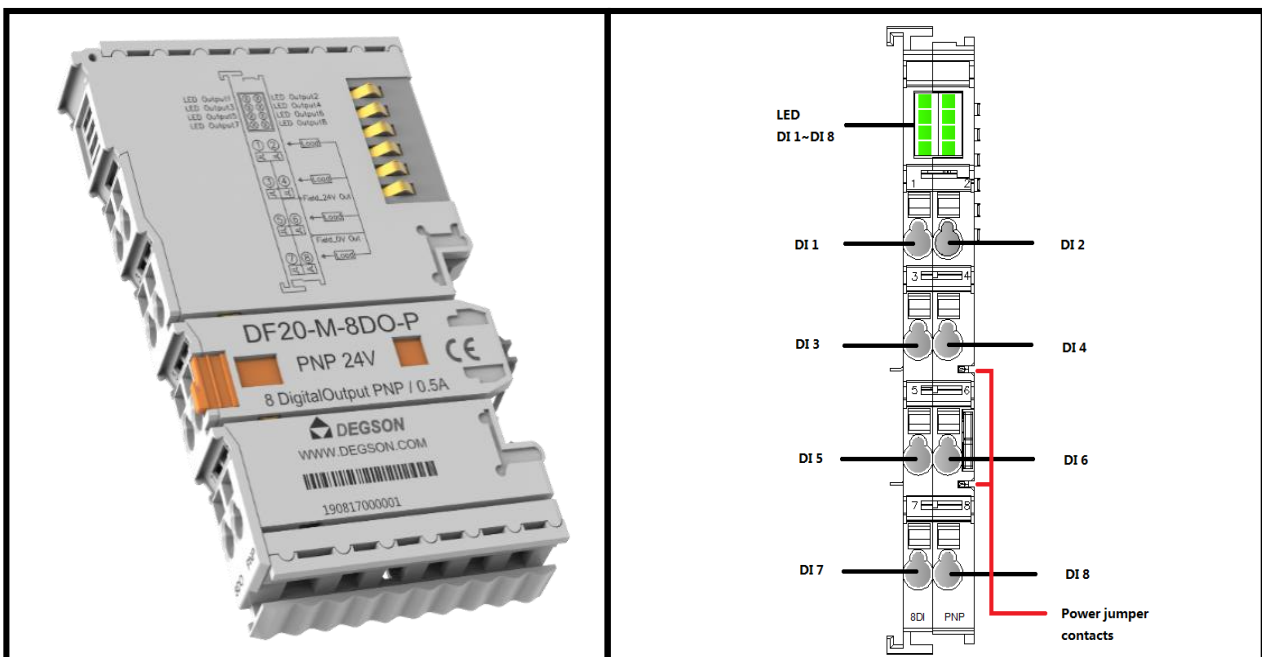


## 1. Specification

<b>Technical data</b>	
Number of digital inputs	8
Number of Channels	8
Signal type	Voltage
Signal type (voltage)	24VDC PNP
Connection type	1-line
Input characteristic	High-side switching
Input filter (digital)	0.3ms
Precision	0.20%
Typical input current	3mA
Voltage range for signal (0)	0~4V
Voltage range for signal (1)	18~32V
Data size	8 bits
Supply voltage (system)	5VDC; via data contacts
Current consumption	<14mA
Working voltage	24VDC (-15%~+20%) via power jumper contacts
Isolation	500Vsystem/field Electrical isolation
Reverse protection	Yes
Indicators	8 x LED Green
Number of incoming power jumper contacts	2
Number of outgoing power jumper contacts	2
<b>Connection data</b>	
Connection technology: inputs / outputs	8 x via pluggable connector
Connection type 1	Inputs/Outputs
Area of wire	0.2~2.5mm <sup>2</sup> /28~14AWG
Strip length	8~9mm/0.31~0.35inches
Mounting type	DIN-35 RAIL
<b>Material Data</b>	
Color	light gray
Housing material	Polycarbonate; polyamide 6.6
Conformity marking	CE
<b>Environmental requirements</b>	
Ambient temperature (operation)	-25~60°C
Surrounding air temperature (storage)	-40~85°C
Protection type	IP20
Pollution degree (5)	2, Per IEC 61131-2
Operating altitude	without temperature derating: 0~2000m
Mounting position	Any
Relative humidity (without condensation)	5~95%RH
Vibration resistance	4g, Per IEC 60068-2-6
Shock resistance	15g, Per IEC 60068-2-27
EMC immunity to interference	Per EN 61000-6-2
EMC emission of interference	Per EN 61000-6-3
Exposure to pollutants	Per IEC 60068-2-42 and IEC 60068-2-43
Permissible pollutant concentration H <sub>2</sub> S at a relative humidity < 75%	10ppm
Permissible pollutant concentration SO <sub>2</sub> at a relative humidity < 75%	25ppm


## 2. Hardware Interface

### ● Wiring Terminal

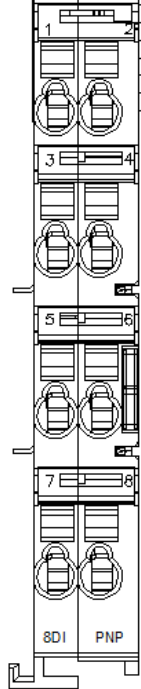


No.	Signal	Description
1	DI 1	High level signal input
2	DI 2	
3	DI 3	
4	DI 4	
5	DI 5	
6	DI 6	
7	DI 7	
8	DI 8	

### ● LED Indicator



1~8 channel Indicators	Definition
ON	Input signal valid
OFF	Input signal invalid

● **Wiring**

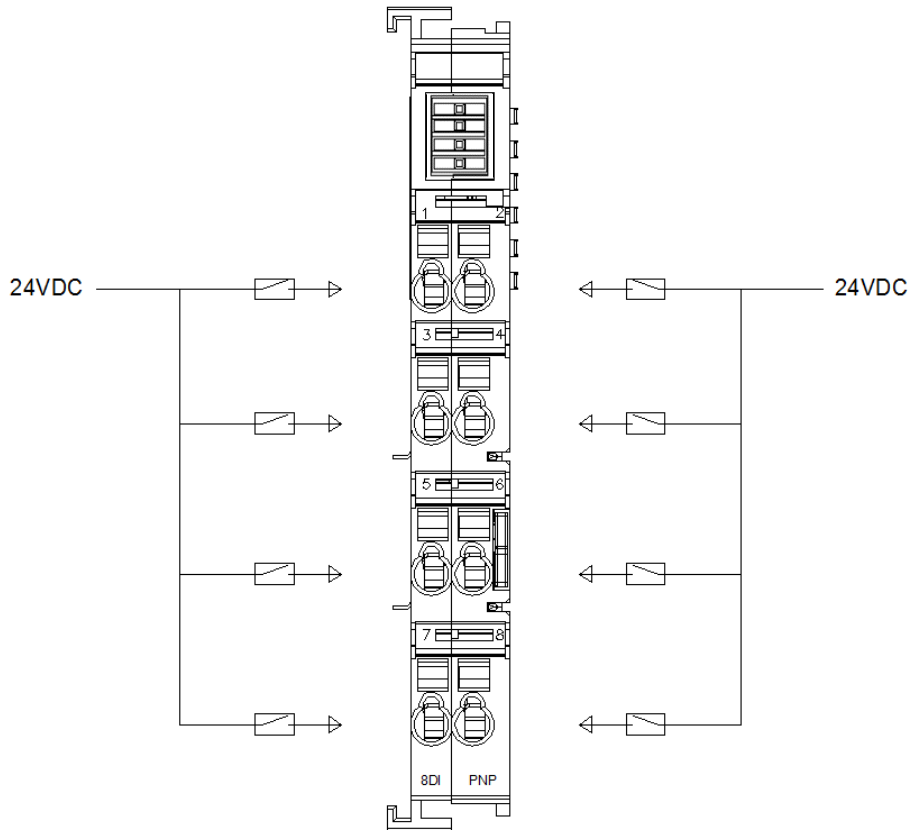

### 3.Process data definition

#### DF20-M-8DI-P Module process data definition

Input data								
Bit No	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Byte 0	DI Channel 8	DI Channel 7	DI Channel 6	DI Channel 5	DI Channel 4	DI Channel 3	DI Channel 2	DI Channel 1

#### Data description:

DI Channel (1~8): When the corresponding channel input signal is valid, the bit is 1, and when the input is invalid , it is 0.

1: Input signal valid      0: Input signal invalid

### 4.Machinery installation

#### ● Dimension drawing

The installation size is shown in the following figure (unit: mm):

