





公差/General tolerances (mm)										0.1/10				
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	±2'
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	




01P




02P






03P





01P



02P/03P




SCALE 1:1

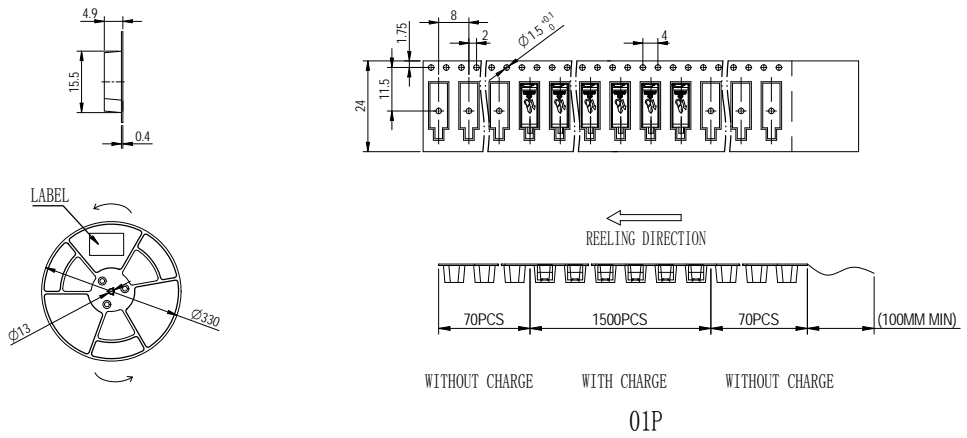


WITHOUT CHARGE WITH CHARGE WITHOUT CHARGE
01P

SCALE 1:1

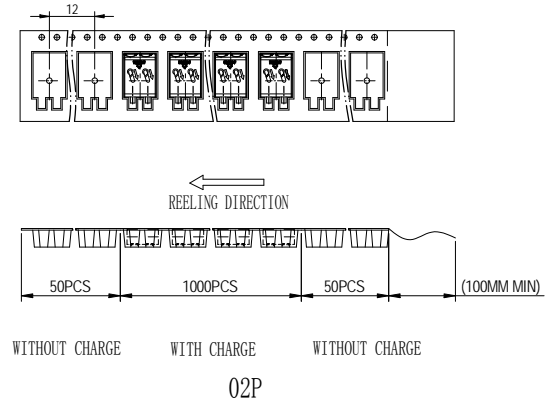

WITHOUT CHARGE WITH CHARGE WITHOUT CHARGE
02P

SCALE 1:1

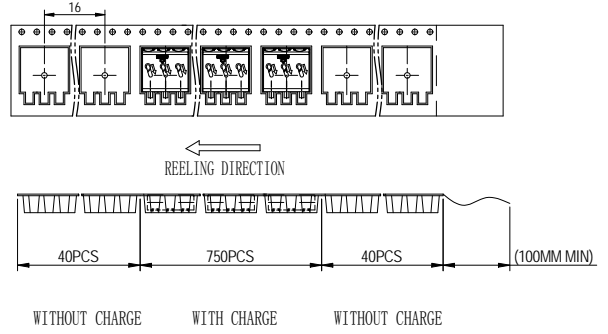

WITHOUT CHARGE WITH CHARGE WITHOUT CHARGE
03P

Note:
The MZ(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	pin header	Copper alloy	Sn Plated
2	Spring	Stainless steel	/
1	Housing	LCP	UL94V-0

UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600V/9A(01P) 300V/9A(02P/03P)
IEC 标准/IEC Standard:	
过压类别/Ovenoltage Category/污染等级/Pollution Degree	III/3 III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)	32/9 160/9 160/9
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4 4 4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24-18 / 0.2-0.75
间距/Pitch(mm)/线数范围/Poles	4.0/N=01-03P
剥线长度/Stripping length(mm)	9
使用温度范围/Operating temperature(°C)	-40--+105
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色/Standard color:	Grey/Black/Orange

MATERIAL:		SURFACE COLOR:	
料号/MAT NO.	00	表面颜色/SURF. STAT.	数量/Quantity

APPD.	DATE	NAME	TYPE
陈静	2022.08.02	陈静	客户图

REV	BY	DESCRIPTION	DATE	APPD.	DATE	DRAWING NO.	SCALE	SHEET
00	陈静		2022.08.02	陈静	2022.08.02	200031770	2.5:1	1/1

DC2002-4.0-XXP-1Y-100A(Z)(H)

CUSTOMER DRAWING 巴发奇