






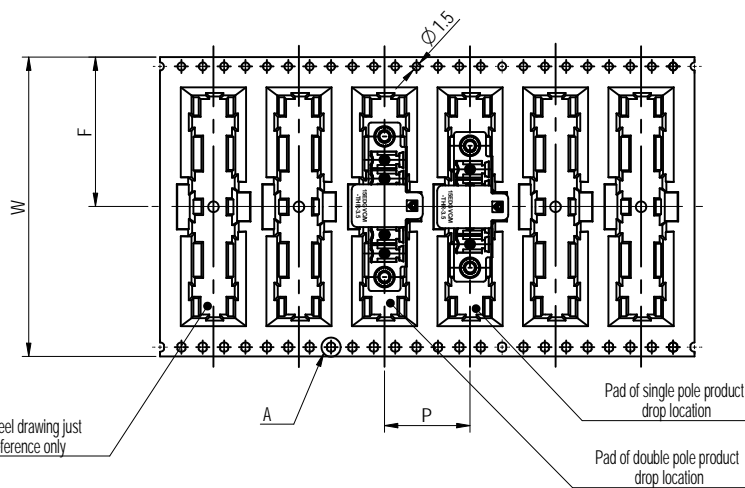


公差/General tolerances (mm)											$\frac{D}{\phi}$													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10										
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	$\frac{D}{\phi}$										
±0.12											±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2



Pole	Width /W	Pitch /P	Width/F	Width/BO	Qty. per reel	Reel qty. per carton	Qty. per carton
2P	32mm	16mm	14.25mm	18.11mm	200	8	1600
3~8P	56mm	20mm	26.25mm	40.97mm	200	5	1000
9P	72mm	16mm	34.25mm	59.47mm	180	3	540
10~13P	72mm	16mm	34.25mm	59.47mm	200	3	600

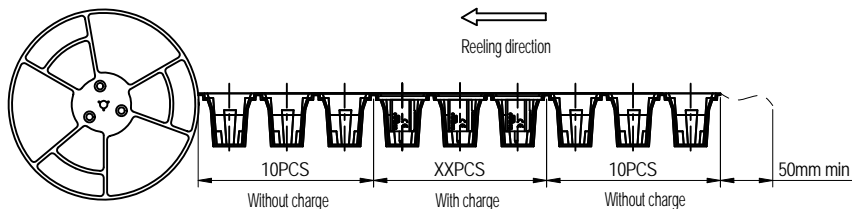

Note:  
The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Suction piece	Thermoplastic	UL94V-0
3	Pin	Copper	Sn plated
2	Screw cap	Copper alloy	M2.5
1	Housing	Thermoplastic	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	250/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	2.5
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		

**DIAGON** MATERIAL: SURFACE/COLOR: MAT NO./REV: /00 MAT STATUS: 批量

NAME: 15EDGVM-THR-3.81-XXP-1Y-00A&Z(H)

APPD: 兰泰华	2023.01.04	NAME	
CHKD: 陈超	2023.01.04	DRAWING NO.	200029360
DRFT: 黄徐涛	2023.01.04	TYPE	CUSTOMER DRAWING
		DRAWING STATUS	已发布
		SCALE	1:1
		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			黄徐涛	2023.01.04