





2P-3P





4P-7P

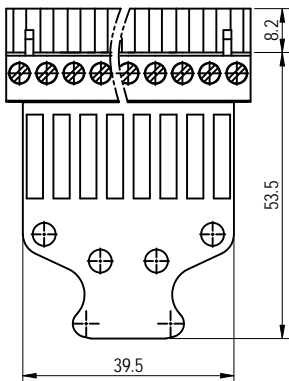

8P-16P

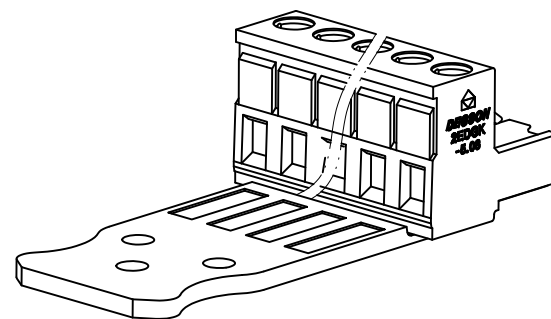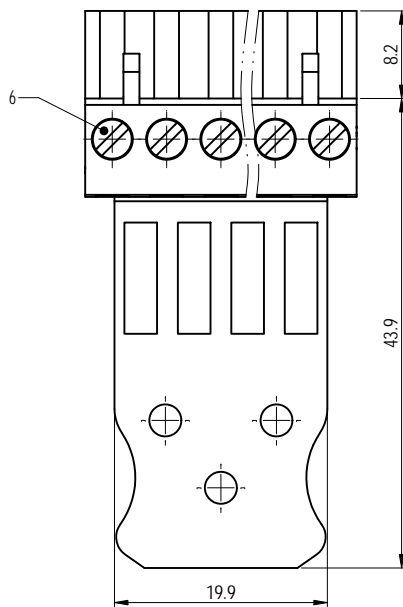

公差/General tolerances (mm)													D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

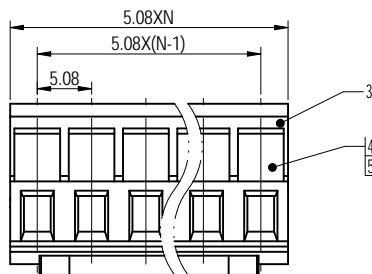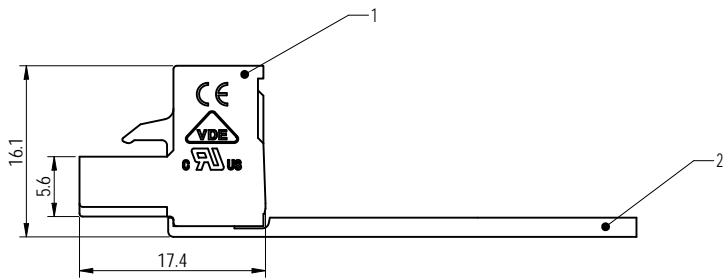

Note:
The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	Zn_Plated
5	Cage	Copper_alloy	Ni_Plated
4	Clamp	Copper_alloy	Sn_Plated
3	Cover	PA66	UL94V-0
2	Housing1	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	7	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	II/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压/(KV)/Rate Impulse Voltage(KV)	/	4	/
螺栓扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12/1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~16P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: - / 00		MAT STATUS: 批量	

APPD: 兰春华	2023.01.28	NAME	2EDGKE-5.08-XXP-1Y-00A&Z(H)		
CHKD: 黄耀志	2023.01.28	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
DRFT: 方哲盛	2023.01.28	200019718	CUSTOMER DRAWING	已发布	2:1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
00				2023.01.28	1/1

Transfer or duplication of this document as well as the utilization of its contents without the written permission of the copyright owner is prohibited. All rights reserved for patent.