
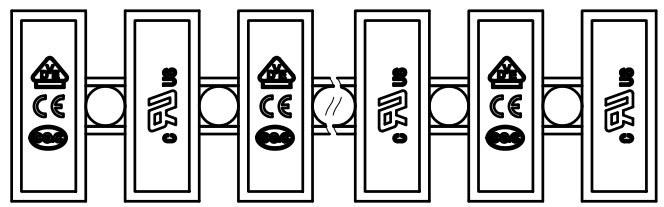
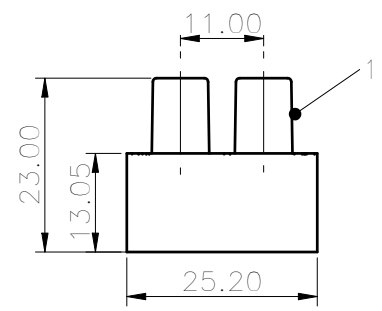
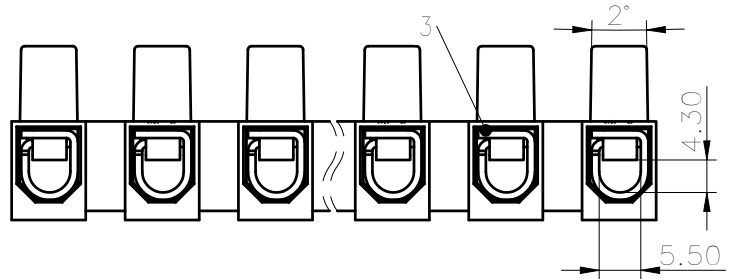


未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
3	6	10	18	30	50	80	120	180	250	315	400	500	>500
~	~	~	~	~	~	~	~	~	~	~	~	~	~

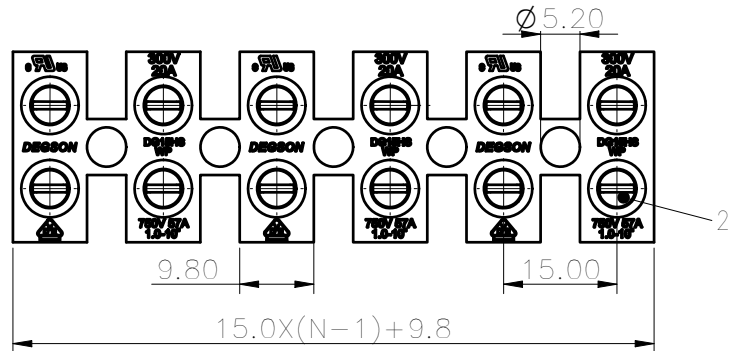

Note: The A&Z (H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Steel	Zn plated
2	Screws	Steel	Zn Plated/M4
1	Housing	PA66	UL94V-2

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	750/57		
额定电压/电流/Rated Voltage(V)/Current(A)	750/57		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.62		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	12(SOL)/ 1~10		
间距/Pitch(mm)/线数范围/Poles	15/N=2~12P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL:	SURFACE:	
APPD: 蓝贵凡	2022.12.05	MAT NO./REV:	/ 00	
CHKD: 曹利彬	2022.12.05	NAME		
DRFT: 孙科豪	2022.12.05	DG15HWP-1.2-XXP-1Y-100A&Z(H)		
REV: 00	ECN:	DRAWING NO.	TYPE	DRAWING STATUS
		200017095	CUSTOMER DRAWING	已发布
		SCALE	1:1	SHEET
				1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. All rights reserved for patent, utility model or design registrations. 非经书面授权, 严禁禁止转让、复制、利用、交加本文件的内容。一经发现侵权, 侵权者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。