



公差/General tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.50	±2.20	±2.50	±Z

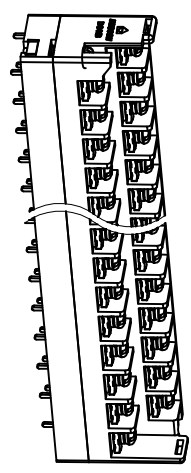

1:2

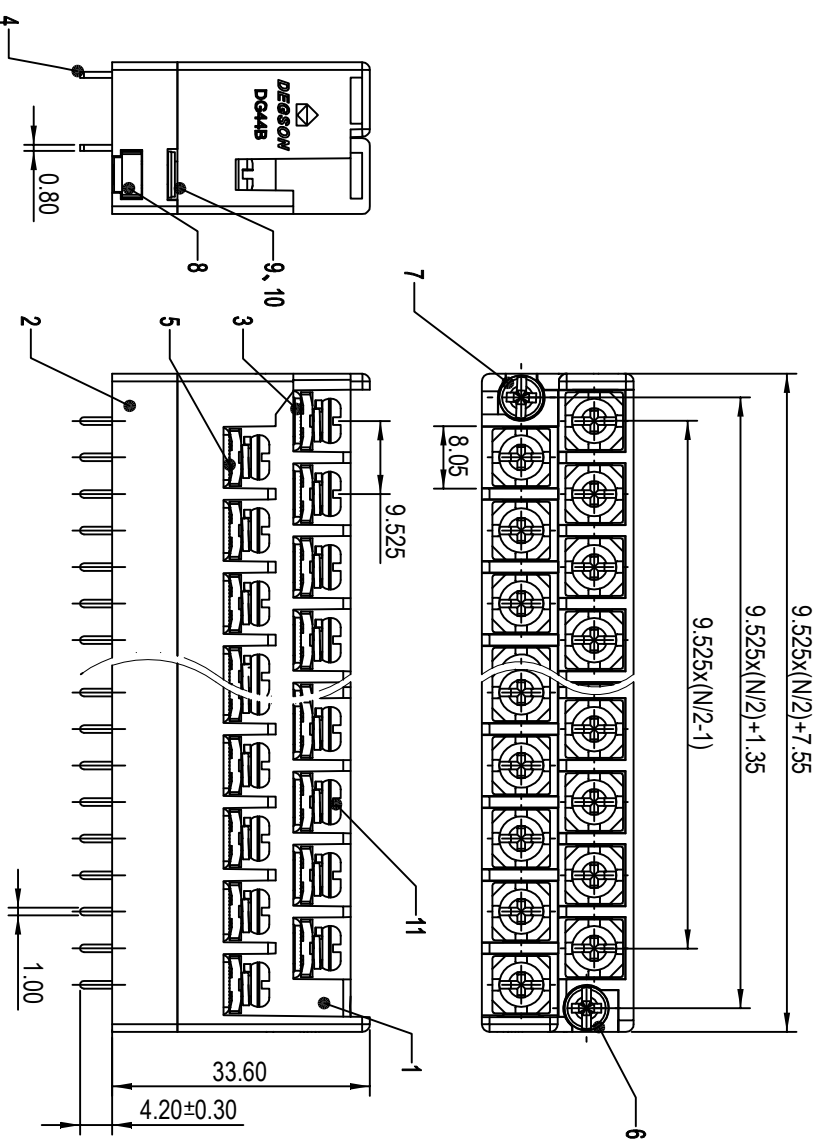


Note: The AKZ (H) in the name means: A (H) and Z (H).

ITEM	NAME OF PART	MATERIAL	NOTES
19	3 Group Screw	Steel	M3.5/Ni plated
10	Ring	Stainless steel	/
9	Gasket	Iron	Ni plated
8	Nut	Copper alloy	M3.5/Ni plated
7	Short Screw	Steel	M3.5/Zn plated
6	Long Screw	Steel	M3.5/Zn plated
5	Short pin header	Copper alloy	Au plated
4	Middle pin header	Copper alloy	Au plated
3	Long pin header	Copper alloy	Au plated
2	Bottom Housing	PA66+GF	UL94V-0
1	Housing	PA66+GF	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/Rated Voltage(V)	Current(A)	300/15	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		250/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4	/	/
螺丝扭矩/Torque Tightening(N·m/lb·in)		M3.5: 0.79/7.03		
线径范围(硬线和软线)/Wire Range (rigid and flexible) (AWG/mm²)		22-14 / 0.2-2.5		
间距/Pitch(mm)/线数范围/Poles		9.525/N=10-38P		
剥线长度/Stripping length(mm)		9-10		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL: /	SURFACE/COLOR: /
MAT NO./REV: -	MAT STATUS: 批量

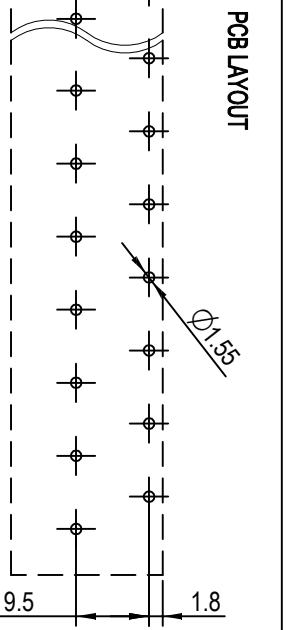

REV	EON	DESCRIPTION	DRAFT	DATE
00				

APPR:	CHKD:	DRFT:	DATE:	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
董建元	曹利彬	董建元	2023.02.22	200153521	CUSTOMER DRAWING	已发布	1:1	1/1