

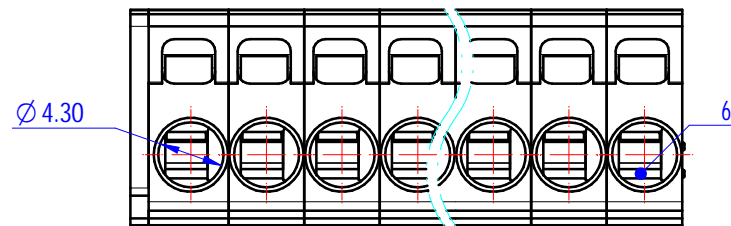
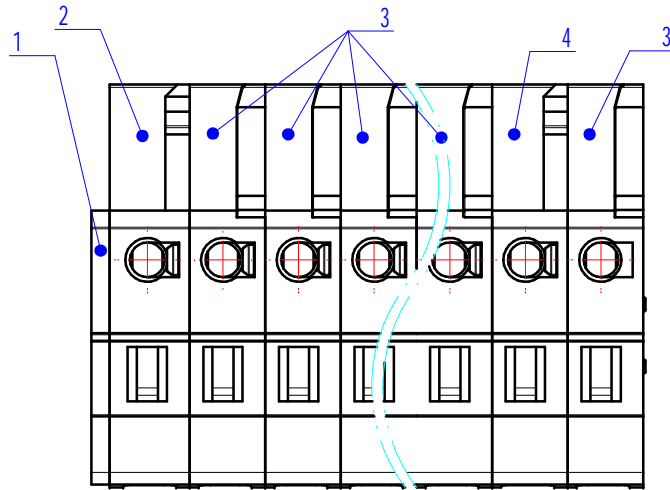
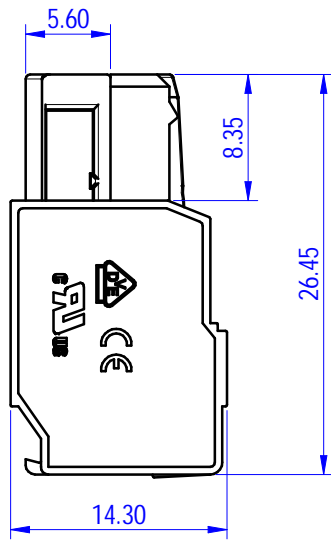


Transfer or duplication of this document as well as the utilization or summarization of its contents are prohibited unless explicitly authorized by Degson. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、软件著作权等知识产权外，其他权利均归德松公司所有。未经许可，不得复制或传播本文件内容。本公司保留对涉及发明、实用新型或外观设计专利的权利。

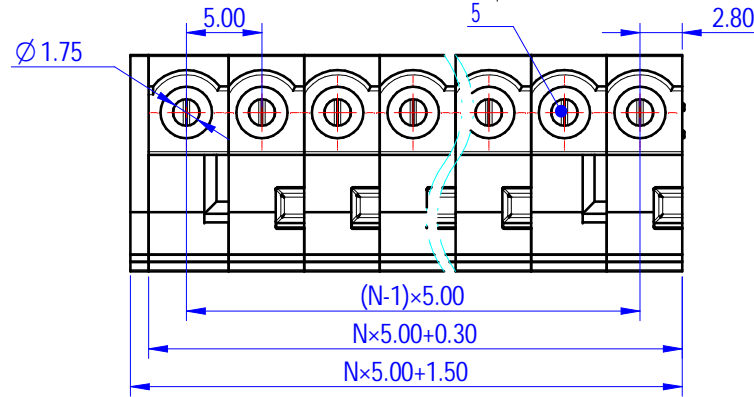

未注公差/General tolerances (mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50	±2'

ITEM	NAME OF PART	MATERIAL	NOTES
6	Spring	Stainless Steel	/
5	Clamp	Copper alloy	Sn Plated
4	Housing 2	PA66	UL94V-0
3	Housing 1	PA66	UL94V-0
2	Side Housing	PA66	UL94V-0
1	Cover	PA66	UL94V-0

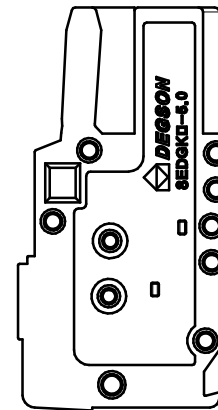

UL 标准/UL Standard:			
额定电压/电流/Rated Voltage (V)/Current (A)	300/15		
IEC 标准/IEC Standard:			
过压类别/Over voltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage (V)/Current (A)	320/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage (KV)	4	/	/
线径范围(硬线和软线)/Wire Range (rigid and flexible) (AWG/mm ²)	22~14 / 0.2~2.5		
间距/Pitch (mm)/线数范围/Poles	5.00/N =02~24P		
剥线长度/Stripping length (mm)	9~10		
使用温度范围/Operating temperature (°C)	-40~+105		
符合RoHS 环保要求/Conform to RoHS	Yes		

	MATERIAL:	SURFACE/COLOR:
	MAT NO./REV: 10020001203-1 / 00	MAT STATUS: 批量
APPD:	NAME	
CHKD:	8EDGKB-5.0-XXP-11-1001A&Z (H)	
DRFT:	DRAWING NO. 200285574	TYPE CUSTOMER DRAWING
		DRAWING STATUS work
		SCALE 2:1
		SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				