



02P

公差表(General tolerances)(mm)													D		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2	±2
尺寸			范围			公差									
A, B			12≤N≤24			+1.2/-0									

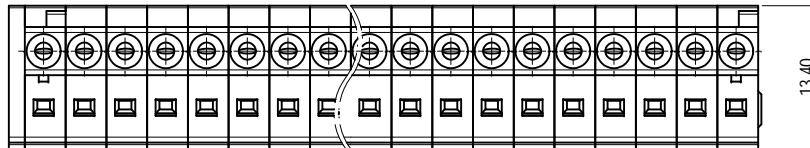

13.40

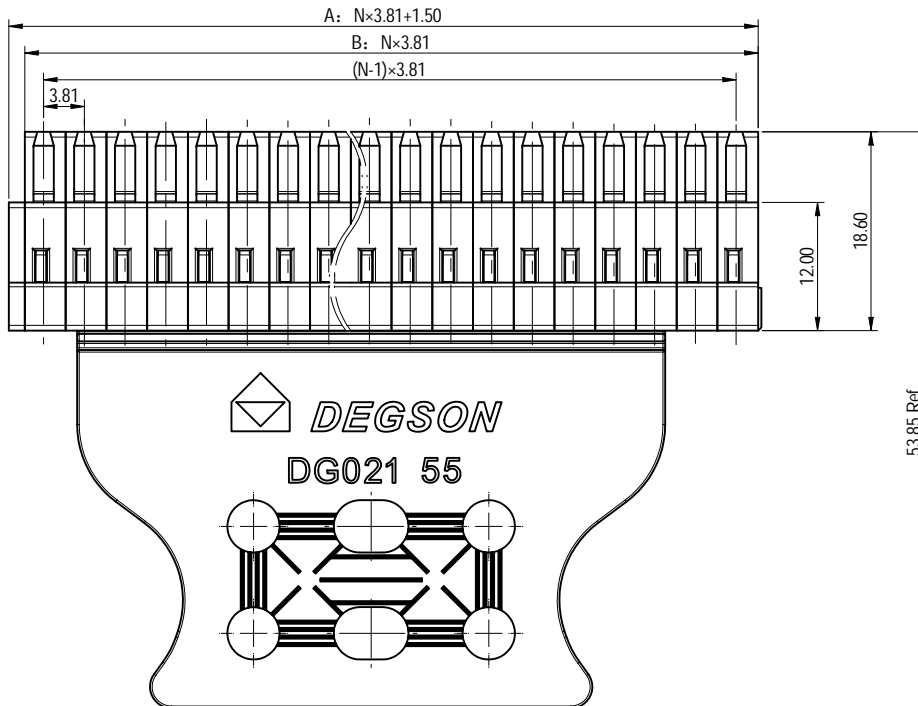

A: N×3.81+1.50

B: N×3.81

(N-1)×3.81


3.81

18.60

12.00

53.85 Ref.


N: 17P~24P

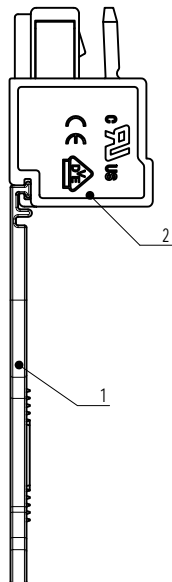

2


1

N: 02P~03P
SCALE 1:1




36.35 Ref.

N: 04P~08P
SCALE 1:1




38.85 Ref.

N: 09P~12P
SCALE 1:1



43.85 Ref.

N: 13P~16P
SCALE 1:1



48.85 Ref.

Note: The A&Z(H) in the name means: A(H) and Z(H).

2	Semi-manufactures	/	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C D
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)		130/10	160/10 400/10
额定脉冲电压/Rate Impulse Voltage(KV)		2.5	2.5 2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)(mm ²)		28~14 / 0.2~1.5	
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P	
剥线长度/Stripping length(mm)		6~7	
应用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS			
MATERIAL:		SURFACE/COLOR: PANTONE 428C	
MAT NO./REV: - / 00		MAT STATUS: 批量	

DEGSON		NAME		DRAWING NO.		TYPE		DRAWING STATUS		SCALE		SHEET	
APPD: 蓝美凡	2023.12.20	SEDGKE-3.81-XXP-11-01A&Z(H)		200262272		CUSTOMER DRAWING		已发布		2:1		1/1	
CHKD: 曹利影	2023.12.20												
DRFT: 姜民洁	2023.12.20												

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or reproduction of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent. 此文件及其中所载之内容之复制或再行利用，或未经授权之复制或再行利用，均属侵权行为。如有任何侵权行为，本公司保留追究法律责任之权利。