




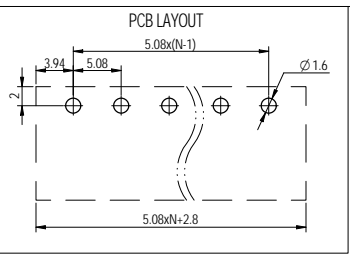
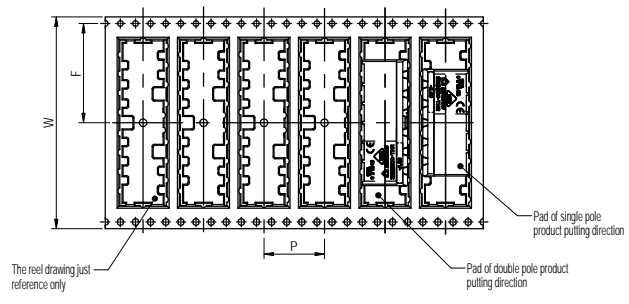


Reel Name	POLE	Width/W	Pitch/P	Width/F	Width/Bo	Qty. pre reel	Reel qty. per carton	Qty. per carton
2EDGRM-THR-5, 08-REEL(32)	02-03	32mm	16mm	14.25mm	20.62mm	330	8	2640
2EDGRM-THR-5, 08-REEL(56)	04-08	56mm	16mm	26.25mm	43.72mm	330	5	1650
2EDGRM-THR-5, 08-REEL(88)	09-12	88mm	16mm	42.25mm	71.42mm	240	3	720

公差/General tolerances(mm)													
0	>0	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.170
-	-	-	-	-	-	-	-	-	-	-	-	-	>500
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

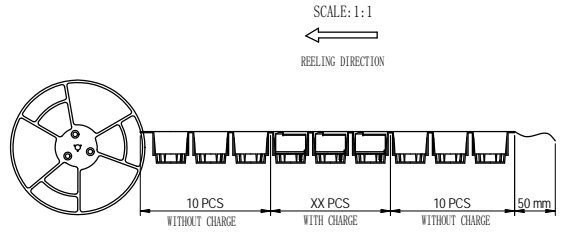

Note:
The AKZ (H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sa Plated
1	Housing	Thermoplastic	UL94V-0

UL 标准/UL Standard	B	C	D
额定电压/电压(Rated Voltage)(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard			
污染等级/Contamination Category/污染等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压(Rated Voltage)(V)/Current(A)	320/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	/	/
间距/Pitch(mm)/间距范围/ Pitches	5.08N-02~12P		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

MATERIAL:	DEGRON	SURFACE COLOR:	
MAT. NO. / REY:	10030001781-1 00	MAT STATUS:	数量
DATE:	2022.11.22	NAME:	
REV:	001	DESCRIPTION:	2EDGRM-THR-5, 08-05P-13-00AKZ (H)

REV	REV	DESCRIPTION	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE
00	001		2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22	2022.11.22

Drawing of this product is for reference only. In the utilization or modification of its content, we require you to confirm the actual product. The drawing is subject to change without notice. Please refer to the actual product for the final drawing.